

# OUTDOOR

## SONANCE LANDSCAPE SERIES

### LS6T SAT

### Overview

The LS6T SAT is the first generation of Sonance Landscape Series to include a wide bandwidth Sonance Laminated Core Transformer with an adjustable tap, making it flexible and powerful for any outdoor landscape application. The SLS Sat and Sub system provides a superior landscape aesthetic with its discreet design and finish. The system blends into the terrain along walkways, tucked into planter beds, mounted up in the trees, and anywhere you want your audio to reach.

The all new Sonance SLS speakers and subwoofers are redesigned and engineered from the ground up for ultimate performance in any outdoor space, paving the way for premium audio in outdoor entertaining spaces. Designed using performance features borrowed from both Sonance Professional Series and Visual Performance Extreme, Sonance Landscape Series boasts a completely immersive and performance-driven outdoor experience.



LS6T SAT

### Key Features

#### Aesthetics

- Designed to blend in with landscape surroundings
- Color-molded composite construction won't chip, peel or fade over time

#### Performance

- Part of a scalable system that delivers perfectly even coverage and unequalled sonic performance throughout any space
- New 6 1/2" woofer for higher output when LS4T SAT isn't enough
- Sonance Laminated Core Transformer (SLCT) with an adjustable Tap for 60W, 30W, 15W, (7.5W 70V), and 8 Ohm installations

#### Installation

- 1/2" NPS male mounting threads enable flexible mounting options
- Enhanced mounting knuckle design

#### Environmental

- Color-molded composite construction won't chip, peel or fade over time
- UV-resistant composite enclosure
- High heat ABS, non-corrosive sealed enclosure to handle extreme conditions
- Rust-proof grille; removeable for easy replacement
- IP66 and MIL STD 810 rated




Ground stake  
sold separately

## Dimensions

<b>Length:</b>	11.70" (297mm)
<b>Diameter:</b>	7.43" (189mm)

## Specifications

<b>SKU:</b>	93370
<b>Unit of Measure:</b>	Each
<b>Tweeter:</b>	1" (25mm) Polyurethane dome
<b>Woofers:</b>	6 1/2" (165mm) Injection molded polypropylene cone with a Santoprene™ rubber surround
<b>Frequency Response:</b>	55Hz - 20kHz ±3dB
<b>Transformer Taps:</b>	60W, 30W, 15W, (7.5W 70V), 8 Ohms
<b>Enclosure Material:</b>	High Heat ABS, non-corrosive sealed enclosure
<b>Dimensions (L x Dia.):</b>	11.70" x 7.43" (297mm x 189mm)
<b>Shipping Weight:</b>	10.75 lbs (4.88kgs) each

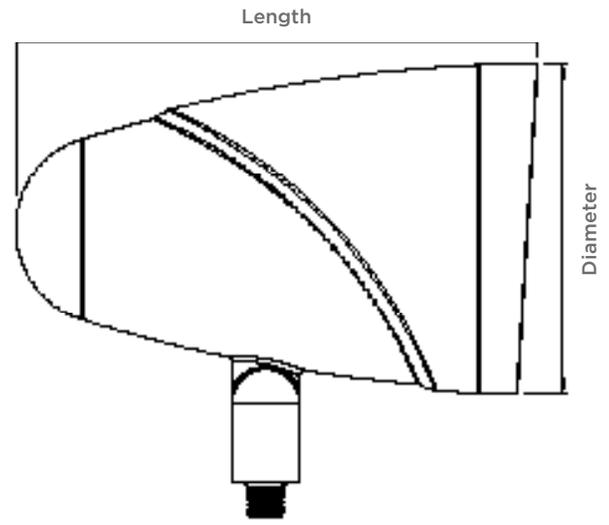

## Recommended Products

Sonamp DSP 2-750 MKII Amplifier (Each)	93379	
LS12T SUB (Each)	93371	
LS15T SUB (Each)	93372	
HS12T SUB (Each)	93373	
19" Ground Post for LS6T SAT (Each)	92925	
Tree Mount for LS6T SAT (Each)	92927	
Surface Mount for LS6T SAT (Each)	92926	

### LIMITED FIVE (5) YEAR WARRANTY

Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated below. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. Warranty Period for this Product: Five (5) years from the date on the original sales receipt or invoice or other satisfactory proof of purchase.



©2018 Sonance. All rights reserved.

Sonance and Visual Performance are registered trademarks of Dana Innovations.

Due to continuous product improvement, all features and specifications are subject to change without notice.

For the latest Sonance product specification information visit our website: [www.sonance.com](http://www.sonance.com)

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 USA  
(949) 492-7777 • FAX: (949) 361-5151 • Technical Support: (949) 492-7777

[www.sonance.com](http://www.sonance.com)