



# OUTDOOR ON WALL LOUDSPEAKERS

## OVERVIEW

Attractive, rugged and sonically accurate, our On Wall Collection of loudspeakers can be used in any outdoor environment to fill an area with beautiful sound. On the wall, attached to a pillar or under the eaves, sound can be projected across the deck or around the pool. High-performance drivers and passive radiators produce an impressive frequency response and allow homeowners to enjoy the same fidelity they experience inside the house.

## PRODUCT ID



OS67



OS65DT



OS65



OS57



OS55DT



OS55

## EXCLUSIVE ENHANCEMENTS

Our Outdoor On Wall Loudspeakers are the best in class when it comes to audio and installation enhancing features. The rectangular driver and passive radiators on our OS6 series produce serious low-end while remaining aesthetically refined, and the 2-way design on our OS5 series offers realistic audio with an even smaller footprint.



# OUTDOOR ON WALL LOUDSPEAKERS

SPECIFICATIONS	OS67	OS65DT
Part	OCS6700B, OCS6700W	OCS6500DTB, OCS6500DTW
Woofers	4 x 8" Glass Fiber, 2 Passive Radiator	4 x 8" IMG, 2 Passive Radiator
Tweeter	1" Aluminum	1" Dual Aluminum
Frequency Response	52Hz-20kHz	58Hz-20kHz
Power RMS	50 Watts	50 Watts
Power Peak	150 Watts	150 Watts
Impedance	6 ohm	6 ohm
Enclosure	HDPE	HDPE
Grille	Aluminum	Aluminum
Dimensions	7 1/8 x 6 11/16 x 13 1/8" (182 x 172 x 334mm)	7 1/8 x 6 11/16 x 13 1/8" (182 x 172 x 334mm)

SPECIFICATIONS	OS65	OS57
Part	OCS6500B, OCS6500W	OCS5700B, OCS5700W
Woofers	4 x 8" IMG, 2 Passive Radiator	5 1/4" Glass Fiber
Tweeter	1" Aluminum	3/4" Aluminum
Frequency Response	58Hz-20kHz	52Hz-20kHz
Power RMS	50 Watts	50 Watts
Power Peak	150 Watts	125 Watts
Impedance	6 ohm	6 ohm
Enclosure	HDPE	7 1/8 x 6 11/16 x 10 13/32" (182 x 172 x 266mm)
Grille	Aluminum	HDPE
Dimensions	7 1/8 x 6 11/16 x 13 1/8" (182 x 172 x 334mm)	Aluminum



# OUTDOOR ON WALL LOUDSPEAKERS


## SPECIFICATIONS

### OS55DT

### OS55

Part	OCS5500DTB, OCS5500DTW	OCS5500B, OCS5500W
Woofer	5 1/4" IMG	5 1/4" IMG
Tweeter	Dual 3/4" Aluminum	3/4" Aluminum
Frequency Response	63Hz-20kHz	63Hz-20kHz
Power RMS	50 Watts	50 Watts
Power Peak	125 Watts	125 Watts
Impedance	6 ohm	6 ohm
Dimensions	7 1/8 x 6 11/16 x 10 13/32" (182 x 172 x 266mm)	7 1/8 x 6 11/16 x 10 13/32" (182 x 172 x 266mm)
Enclosure	HDPE	HDPE
Grille	Aluminum	Aluminum

## LINE DRAWINGS

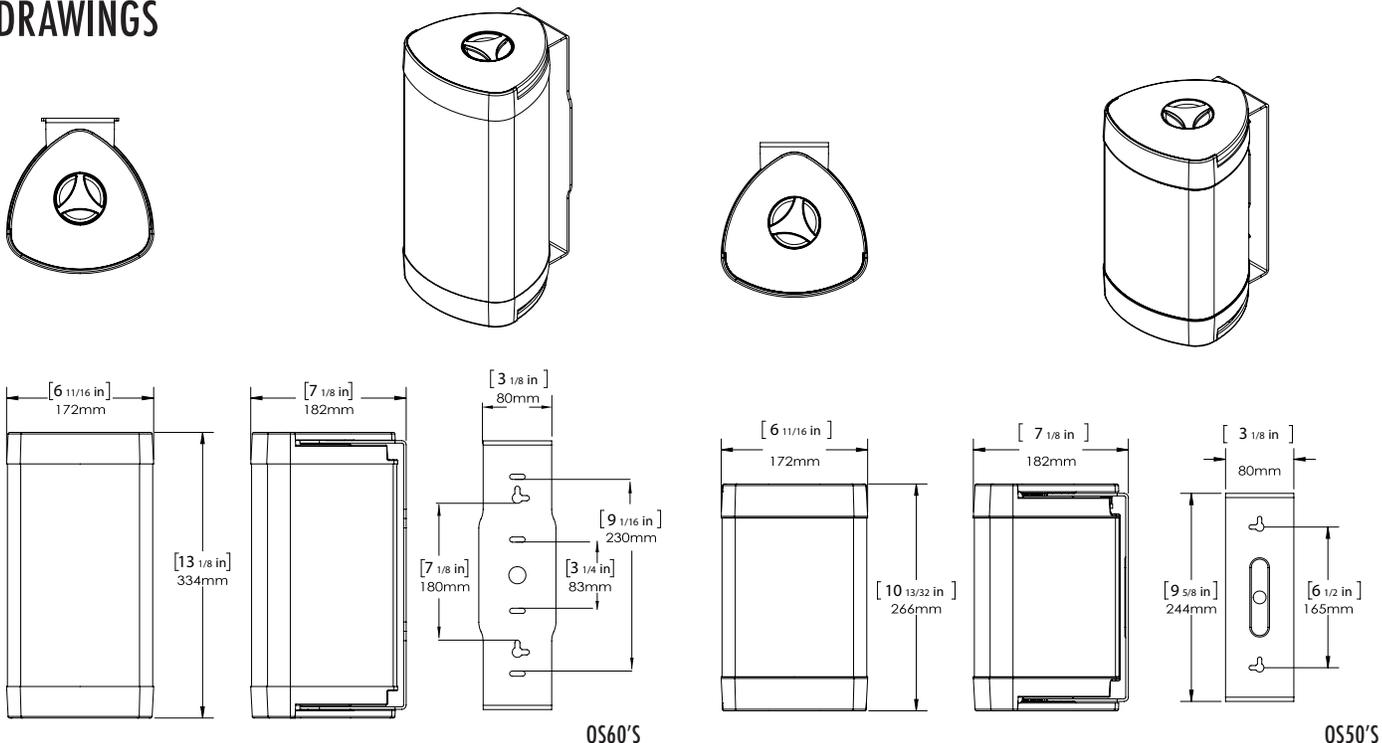

Please see [originacoustics.com](http://originacoustics.com) for most the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.